

SL 000-50
7-23-81

FIAT SERVICE LETTER

SUBJECT: E.P.A. AND CALIFORNIA EMISSIONS REGULATION
CONFORMITY TAGS

VEHICLES: ALL 1981 MODEL

GENERAL INFORMATION: 1981 Fiat vehicles have one of the two following types of emissions regulation conformity tags:

- E.P.A./California (green lettering)
- E.P.A. (black lettering)

See reverse side of this page for locations and examples of the two tags.

IMPORTANT: While vehicles with an E.P.A./California regulation tag may be retailed anywhere in the United States, vehicles with an E.P.A. regulation conformity tag may not be retailed in California but only in the remaining 49 States.

OVER


READ, INITIAL AND PASS ON

Service Manager	Parts Manager	Service Writer	Technician			

California/EPA Regulation Conformity Tag
(Green lettering on a white background)

Vehicles with this conformity tag may be sold in all 50 States.


FIAT FIAT AUTO S.p.A.		VEHICLE EMISSION CONTROL INFORMATION		CATALYST	CA
ENGINE FAMILY NAME: BFT1.5V5FD9 - CID: 91.4 EVAPORATIVE FAMILY: EV-1BC EXHAUST EMISSION CONTROL SYSTEM: EFI-TWC		THIS VEHICLE CONFORMS TO U.S. EPA AND STATE OF CALIFORNIA REGULATIONS APPLICABLE TO 1981 MODEL YEAR NEW MOTOR VEHICLES FOR SALE AT LOW ALTITUDE.			
ENGINE TUNE-UP SPECIFICATIONS AND ADJUSTMENTS AT NORMAL OPERATING TEMPERATURE, VACUUM HOSES CONNECTED					
ITEM	SPEC.		INSTRUCTIONS		
	MANUAL	AUTOMATIC			
TIMING SETTING (DEGREES BTDC @RPM)	10° ± 1.5 800 to 850 (NEUTRAL) 700 to 750 (DRIVE)		ROTATE DISTRIBUTOR AND TIGHTEN IT WHEN STROBOSCOPIC LAMP READING IS ACCORDING TO TAG.		
IDLE SPEED (RPM)	850 ± 50 (NEUTRAL)	750 ± 50 (DRIVE)	ADJUST IDLE SPEED SCREW ON INTAKE MANIFOLD DUCT		
IDLE MIXTURE	IDLE MIXTURE SCREW IS PRESET AND SEALED AT FACTORY. NO PROVISION FOR ADJUSTMENT DURING THE VEHICLE LIFE IS PROVIDED.				
VALVE LASH (COLD)	INT.: .011 to .014 IN. (.28 to .36 mm)	SPARK PLUG GAP	.027 to .031 IN. (.7 to .8 mm)		
	EXH.: .015 to .018 IN. (.38 to .46 mm)				
PROPER MAINTENANCE IS ESSENTIAL FOR CONTINUOUS EFFECTIVENESS. SEE SHOP MANUAL AND MAINTENANCE SCHEDULE FOR ADDITIONAL INFORMATION.					

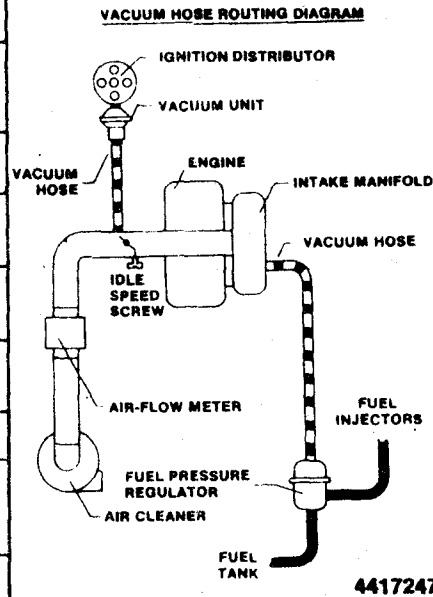

EPA Regulation Conformity Tag
(Black lettering on white background)

Vehicles with this conformity tag may be sold only in 49 States excluding California.

FIAT FIAT AUTO S.p.A.		VEHICLE EMISSION CONTROL INFORMATION		CATALYST	49-S
ENGINE FAMILY NAME: BFT1.5V5FD9 - CID: 91.4 EVAPORATIVE FAMILY: EV-1BC EXHAUST EMISSION CONTROL SYSTEM: EFI-TWC		THIS VEHICLE CONFORMS TO U.S. EPA REGULATIONS APPLICABLE TO 1981 MODEL YEAR NEW MOTOR VEHICLES FOR SALE AT LOW ALTITUDE.			
ENGINE TUNE-UP SPECIFICATIONS AND ADJUSTMENTS AT NORMAL OPERATING TEMPERATURE, VACUUM HOSES CONNECTED					
ITEM	SPEC.		INSTRUCTIONS		
	MANUAL	AUTOMATIC			
TIMING SETTING (DEGREES BTDC @RPM)	10° ± 1.5 800 to 850 (NEUTRAL) 700 to 750 (DRIVE)		ROTATE DISTRIBUTOR AND TIGHTEN IT WHEN STROBOSCOPIC LAMP READING IS ACCORDING TO TAG.		
IDLE SPEED (RPM)	850 ± 50 (NEUTRAL)	750 ± 50 (DRIVE)	ADJUST IDLE SPEED SCREW ON INTAKE MANIFOLD DUCT		
IDLE MIXTURE	IDLE MIXTURE SCREW IS PRESET AND SEALED AT FACTORY. NO PROVISION FOR ADJUSTMENT DURING THE VEHICLE LIFE IS PROVIDED.				
VALVE LASH (COLD)	INT.: .011 to .014 IN. (.28 to .36 mm)	SPARK PLUG GAP	.027 to .031 IN. (.7 to .8 mm)		
	EXH.: .015 to .018 IN. (.38 to .46 mm)				
PROPER MAINTENANCE IS ESSENTIAL FOR CONTINUOUS EFFECTIVENESS. SEE SHOP MANUAL AND MAINTENANCE SCHEDULE FOR ADDITIONAL INFORMATION.					

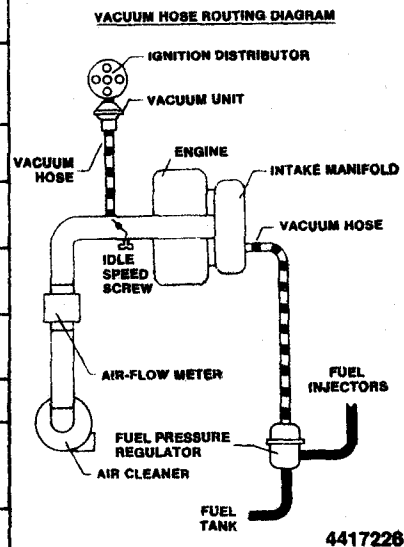

Tag Locations: All tags are located in vehicle engine compartment.

Model

X1/9
Brava
Spider 2000
Strada

Location

Left shock absorber mount
Front hood support brace
Windshield cowl
Right wheelhousing or hood